Technical data sheet

Wooden flat pallet EUR-1 · 1200 × 800 mm

Drevinslovakia


Technical data

Size	**1200 × 800 × 144 mm**
Weight	**20–25 kg**
Load capacity	**1,500 kg (up to 4,000 kg when lying on a flat, solid surface)**
Wood	**spruce, fir – Slovak state forests**
Moisture	**22 % or as required**
Blocks	**solid wood or pressed**
Nails	**EUR/UIC certified**
Treatment	**HT according to ISPM 15**
Construction	**11 boards, 9 blocks, 78 nails**
Fork entry	**four-way**

Pallet marking

UIC	**trademark of the International Union of Railways**
EUR in oval	**trademark of the EUR exchange pallet**
A62-X-XX	**our production code: A62 identifies the manufacturer, X is the last digit of the year and XX the month of production (for example A62-6-11 = November 2026)**
IPPC SK-2142 HT	**heat treatment mark according to ISPM 15**

Dimensions (mm)

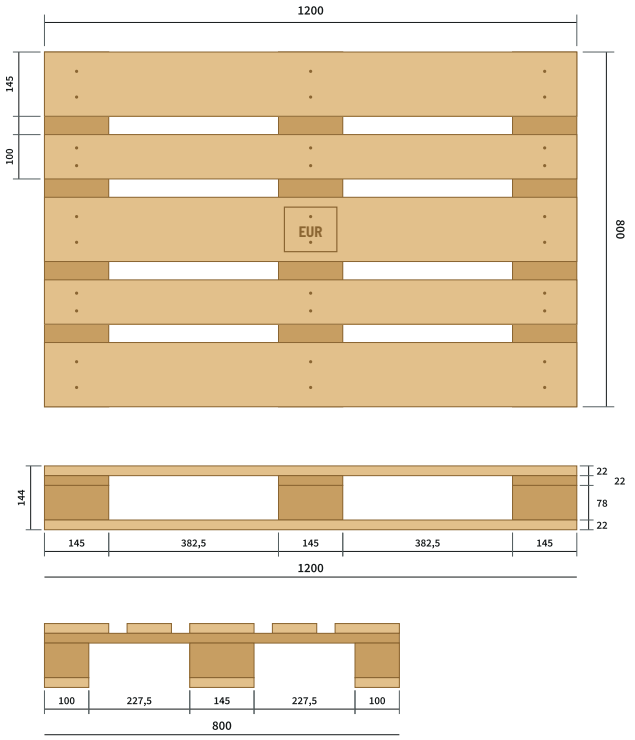

Standards and certificates

- Manufactured to UIC 435-2 (EUR/UIC licence, production code A62)
- Heat treatment to ISPM 15 – IPPC SK-2142 HT, phytosanitary certificate with every delivery
- Quality management system ISO 9001:2015
- EU declaration of conformity under PPWR (EU) 2025/40 – on request

Logistics

- A 13.6 m semi-trailer takes 561 EUR pallets stacked on top of each other, or 700 pieces when stacked into each other.
- We deliver regularly within Slovakia and to neighbouring countries, and can arrange delivery to practically any European country.
- No, we also sell single pallets. We arrange delivery for orders from 50 pallets; smaller quantities can be collected in person in Revúca.

Safety and use

- Do not load the pallet beyond the stated load capacity and distribute the load evenly.
- Check the pallet for damage before use (broken boards, missing blocks, protruding nails). Do not use damaged pallets.
- Stack pallets vertically on a flat, solid surface so that the stack cannot tip over.
- Store pallets dry and under a roof; long-term moisture can cause mould and warping.

Data apply to new EUR-1 pallets from our production. Subject to change.